

PB40, PB60


Pump

- Transfer of clean water or non-aggressive liquid
- Special anti-rust treatment for pump body and support
- AISI 304 shaft
- Max. liquid temperature: +40°C
- Max. suction: +9 m

Motor

- Copper winding
- Built-in thermal protector for single phase motor
- Insulation class: F
- Protection class: IPX4
- Max. ambient temperature: +40°C
- IE2 motor (Three phase, power $\geq 0.75\text{kW}$)

Hydraulic performance curve

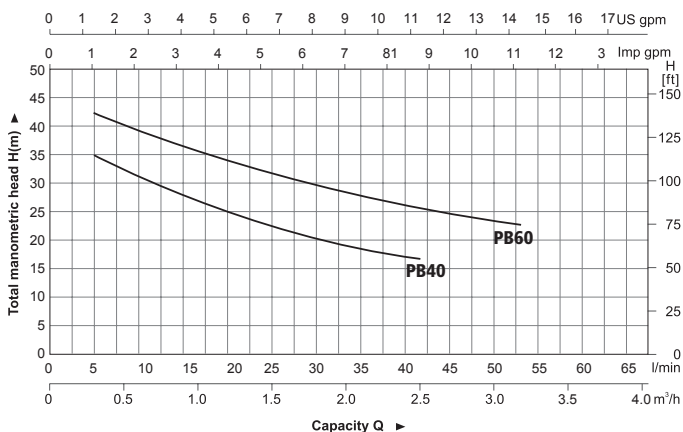

Model	Power		Inlet/outlet	Max flow (L/min)	Max head (m)	Max Suct. (m)
	(kW)	(HP)				
PB40	0.45	0.6	1" x 1"	40	38	9
PB60	0.75	1.0	1" x 1"	60	45	9